





KX-602
Pearl White

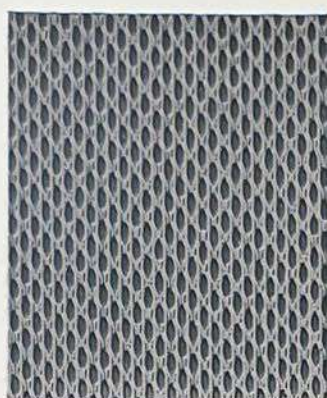

KX-614
Medium Grey

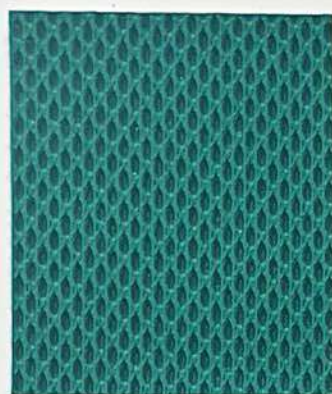

KX-613
Emerald



KX-611
Dark Navy



KX-610
Cream



KX-609
Chocolate



KX-612
Dark Red



KX-601
Charcoal



KX-614
Medium Grey

Specifications

Width: 137 +5; -0 cm

Weight: 723 ± 51 grams/meter²

Thickness: 1 ± 0.10 mm

Cold Resistance: -32°C

Weather/UV Resistance: ASTM G153-00a,
Cycle 1, 1,000 hours, UV coefficient ≥7
Blue Wool Scale

Abrasion Resistance: No significant wear
after 100,000 cycles using the Martindale
test method.

Adhesion of Coating:
(Newtons/25.4mm):
W. 16 minimum F. 16 minimum

Features & Benefits

Mildew Resistance

Bromine-Free, No Halogenated
Flame Retardents (HFRs)

REACH Compliant

RoHS Compliant

Non Toxic

No Heavy Metals

No Mercury

No Bisphenol A (BPA)

No PBT's (Persistent Bio
Accumulative and Toxic Chemicals)

Made in North America

Content

Vinyl

Backing

Polyester

Mellohide™

Flammability Resistance

BS EN 1021-1 and 2

US FMVSS 302 - UNI ISO 3795

CA-TB 117-2013

(Section 1-Cover Fabric), Sect. E

BIFMA Class A/NFPA 260A

UFAC Class 1

IMO MSC 88/26/ADD. 2 Part 8
(3.1 and 3.2)

Recommended Applications

Marine

Corporate

Indoor/Outdoor Seating

Residential/Home Office

Hospitality

General Upholstery

Care and Cleaning Instructions

To prevent build up of dirt and contaminants, which may cause permanent staining, periodic cleaning is highly suggested. The frequency of cleaning is dependent upon the environmental conditions the material is subjected to.

In general, most common stains can be cleaned using warm, soapy water and clear water rinses. Moderate scrubbing with a medium bristle brush will help loosen soiling materials from the depressions of embossed surfaces. For more stubborn stains, use Formula 409® commercially available cleaner† in accordance with the manufacturer's instructions.

Full strength rubbing alcohol or mineral spirits†† may be tried cautiously as a last resort on very stubborn stains, if the above suggestions do not work. Indiscriminate use of any solvent, or solvent containing cleaner, can severely damage or discolor vinyl. Always follow with a clear water rinse after cleaning with solvents.

Note: Detergents should never be used on a regular or repeated basis for normal cleaning. Morbern recommends repeated rinsing with clear water after any cleaning procedure.

Bleach Cleanable: When disinfecting with bleach, dilute with water up to a 9:1 ratio (10%). liberally apply diluted disinfectant using a sponge. Rinse with cold water several times. Wipe dry and repeat if necessary. Federal regulations require that guidelines on the bleach label to be followed for antiseptic or antimicrobial purposes.

† When opening a new container, please test the cleaner in an inconspicuous area as cleaning manufacturers may change formula without notice.

Morbarn cannot be responsible when unknown changes are made by the manufacturer of the cleaner to their formulations between our 6-month verification intervals.

†† Caution: Exercise care as these solvents are flammable. use only small quantities of solvents and keep clear of any sources of ignition. Wear protective gloves and ensure cleaning takes place in a well ventilated area.

www.morbern.com



Kixx



Morbarn is
an ISO 9001:2008
Certified Supplier
©2017 Morbern, Inc.